

PROJECT: Minnesota Avenue Sanitary Sewer Improvement

General Description: This project will remove and replace approximately 2,300 feet of 12-inch sewer main on Minnesota Ave. New sewer mains will drain toward a new pump station located at the intersection of Bird and Minnesota Avenues. (The pump station will be constructed by the Padres Drive Sanitary Sewer Rehabilitation project.)

This project was developed to address a problematic sewer main that runs along Minnesota Avenue which has experienced blockages and overflows in recent years largely due to a very flat slope of the pipe line.

Streets to be impacted: Minnesota Ave between Lincoln and Bird Avenues


Traffic on Minnesota Avenue will be impacted during construction. Work at the intersection of Lincoln Avenue and Willow Street will be done during off-peak hours. Police Officers will be used at the signalized intersections to help direct traffic as needed.

Total Project Cost: \$1,770,000

Schedule: Estimated Council Award: November 2011
Estimated Construction Start: January 2012
Estimated Completion Date: April 2012



MINNESOTA AVENUE SANITARY SEWER IMPROVEMENT

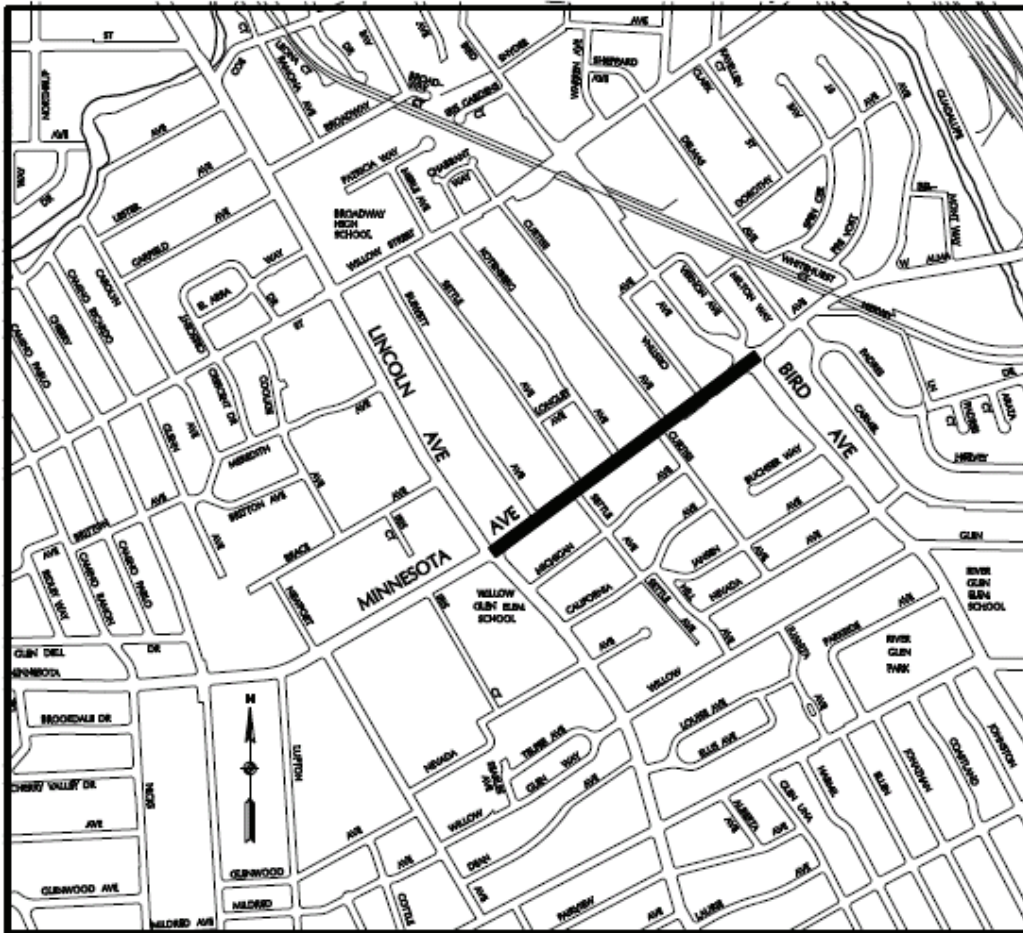

LOCATION MAP
N.T.S.