

## **PROJECT: Westgate Avenue Sanitary Sewer Replacement**

**General Description:** This project will rehabilitate 600 ft of vitrified clay pipe (VCP) and remove and replace approximately 2,700 feet of VCP and cast iron pipe.

The sanitary sewer system in this area was constructed over fifty years ago and requires frequent maintenance by the Department of Transportation in response to sewer back-ups caused by broken clay pipes and severely corroded cast iron pipes.

Located in the southern Willow Glen area, construction will take place on the following residential streets:


- Cottle Avenue between Avalon Drive and Foxworthy Avenue
- Westgate Avenue between Tenaya Drive and Whitegate Avenue
- Avalon Drive between Westgate and Cottle Avenues
- Whitegate Avenue
- Tahoe Avenue

To limit the amount of traffic on these residential streets during construction, "Local Traffic Only" signs will be temporarily installed on streets that are directly impacted.


Due to close proximity to Schallenberger Elementary School, police officers may be required to direct traffic at the beginning and ending of school hours during construction.

**Cost:** \$820,000 (Engineer's Estimate)

<b>Schedule:</b>	Estimated Contract Award:	November 2011
	Estimated Construction Start:	February 2012
	Estimated Completion:	November 2012

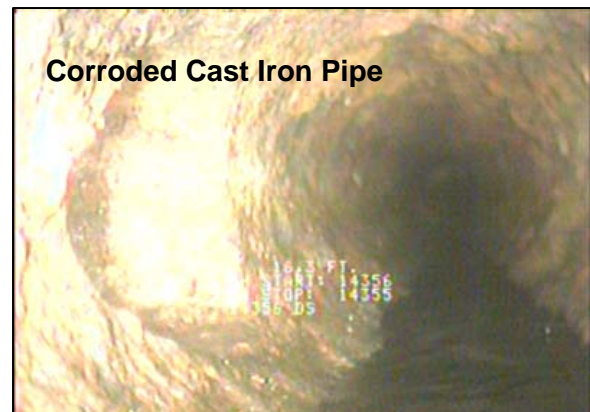

# WESTGATE AVENUE SANITARY SEWER REPLACEMENT

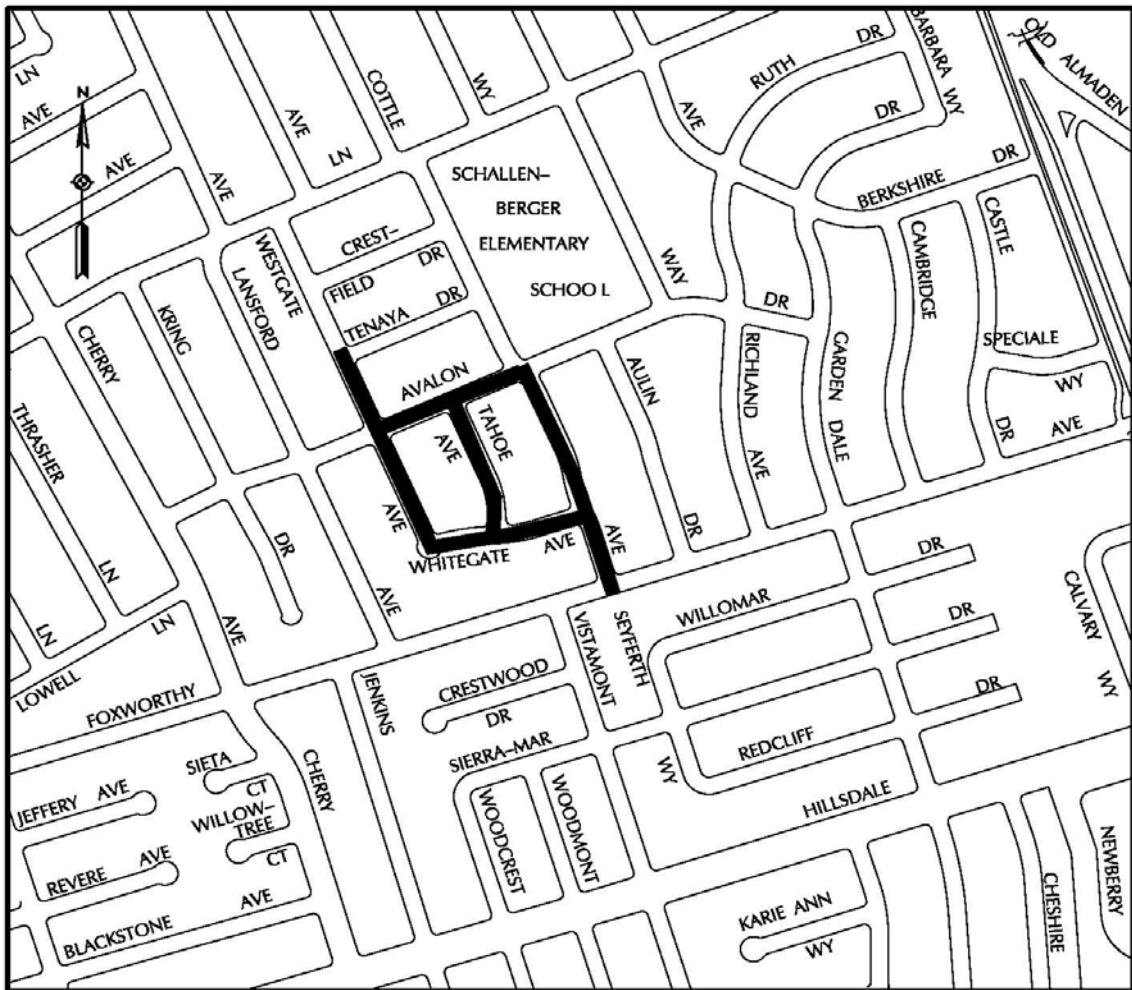

LOCATION MAP  
N.T.S.