


BOLT HOLE SHALL MATCH STANDARD BOLTS; RECESS IN COVER FOR NUT

SEE NOTE 4 - DWG E-05

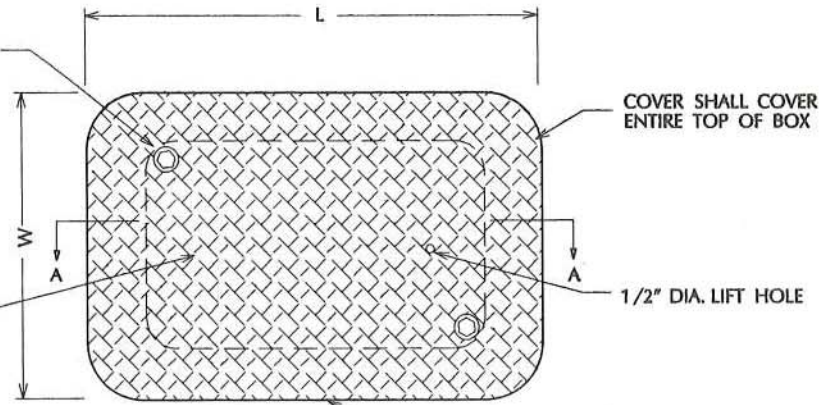

TOP VIEW

FIN. GRADE (SEE NOTE 3 DWG E-04)

CONDUIT BELL END (TYP.)


3" MIN. PCC ON ALL SIDES OF BOX (POUR IN FIELD)

12" MIN.
6" MIN.
6" MIN.

3" MIN. ALL AROUND

3" MIN. ALL AROUND

GROUT BOTTOM OF BOX 1" MIN. AND 2" MAX.



3/8" BRASS HOLD DOWN BOLTS, NUT, AND WASHERS RECESSED IN COVER; 2 PER BOX

1 1/2" X 1 1/2" X 3/16" ∠ MIN. BEVEL ENDS TO FIT LIP OF BOX

PRECAST REINF. CONC. BOX

1 3/4" X 1 3/4" X 3/16" ∠ MIN.

SEAL AROUND CONDUIT WITH GROUT (TYP.)

CONDUIT (TYP.) (PVC SHOWN)

ROOFING PAPER

DRAIN HOLE 1" MIN. - 2" MAX.

ROCK SUMP 1" MIN. - 2" MAX. AGGREGATE

SECTION A - A

DIMENSION A: 1" MIN., 2" MAX. (TYP. - ALL CONDUITS)
" B: 1" MIN., 2" MAX. ABOVE GROUT (TYP. - ALL CONDUITS)

NOTES:

1. APPLICATION: PLACED IN CONDUIT RUNS IN AREAS WHERE BOX IS SUBJECT TO VEHICULAR TRAFFIC LOAD.
2. SEE DRAWINGS E-04, E-05, AND E-06 FOR PULL BOX DETAILS AND NOTES.

APPROVED BY

AWJ

DATE

3/3/92

CONCRETE PULLBOX
TRAFFIC

DEPARTMENT OF PUBLIC WORKS



DRAWING NO.

E-03